



KEY FEATURES

- Typical THD+N -106 dB and 1.2M point FFTs
- Comprehensive test in 3 seconds without any coding
- Intuitive UI with one-click measurements
- Supports VB.NET, C#.NET, MATLAB, full LabVIEW driver
- Share projects and .wav acquisition files with any APx analyzer
- Create custom reports using MS Word and the APx UI
- Advanced measurement library includes IMD, MOL, dynamic range, FFTs, and more

Ideal for production test and entry-level R&D applications

The **APx515** is a high-performance audio analyzer optimized for production test. It is a best-in-class instrument for its combination of speed, performance, automation and ease-of-use.

APx515 can make all of the key audio measurements in less than three seconds. Despite its low cost, APx515 still has excellent performance, with a typical THD+N of -106 dB, 1.2M point FFTs and 216k digital I/O, as well as the one-click automation and ease-of-use of all APx Series audio analyzers. Like all AP instruments, APx515 comes with an ISO:17025 Accredited Calibration and three year warranty, so its results are trusted everywhere.

Comprehensive test in 3 seconds, easy automation AND low cost

APx515 operates either as a stand-alone test unit with its own user interface or it can be controlled by a master .NET or LabVIEW application. In either case, an operator can control the APx515 with a keyboard, foot controller or barcode scanner, or the system can be totally automated. Switchers and external devices such as pass/fail lights are also supported.

In stand-alone mode, sophisticated test sequences are created by selecting from a list of common audio measurements—no coding required. Pass/fail limits, advanced configurations and user prompts can be added as necessary, then the type of report is selected: from rich graphic printouts using Microsoft Word to CSV export files. Additionally, the project can be locked to prevent accidental changes once on the production line.

On an automated manufacturing line, a master .NET or LabVIEW application can control the APx515 directly using the API or APx LabVIEW driver. Individual measurements can be made or the master application can call a test sequence created with the APx UI.

OPTIONS

APx515 has several software options for additional measurement capabilities.

SOFTWARE OPTIONS

SW-HST Adds high speed multitone and continuous sweep measurements

SW-ACR Adds acoustic response measurements

SW-BEN Adds Bench Mode capability to APx515

SW-AML Adds IMD, MOL, dynamic range, FFTs and other advanced measurements

SW-ASIO Adds software connectivity for PC audio interfaces

Trusted results between vendors, designers and manufacturers


Thousands of engineers around the world trust measurements made with AP instruments, so collaboration can start with the mutual agreement that each party's test equipment is accurate and reliable.

From a practical perspective, all APx audio analyzers use the same software, making tests and results easier to share between vendors, R&D and production facilities anywhere in the world.

For example, a test designer using an APx525 can create a production test sequence and email it to a contract manufacturer whose APx515 will run the project natively. Performing quality assurance on the production line, the APx515 operator can save a recording of the actual output of a device under test and email it (along with the 515's settings) in a single project back to Engineering for further analysis.

APx515 Standard Measurements

- Level & Gain
- Frequency Response
- THD+N
- Signal-to-Noise Ratio
- Noise
- Crosstalk
- Interchannel Phase
- DC Level
- Frequency Measurement
- Measurement Recorder
- Stepped Level Sweep
- Stepped Frequency Sweep
- Compare Encoded Bitstream
- CMRR
- SINAD
- Pass / Fail
- Scope Monitor
- DC Level Sweep
- Q-peak Noise
- Level Ratio
- Input Sample Rate

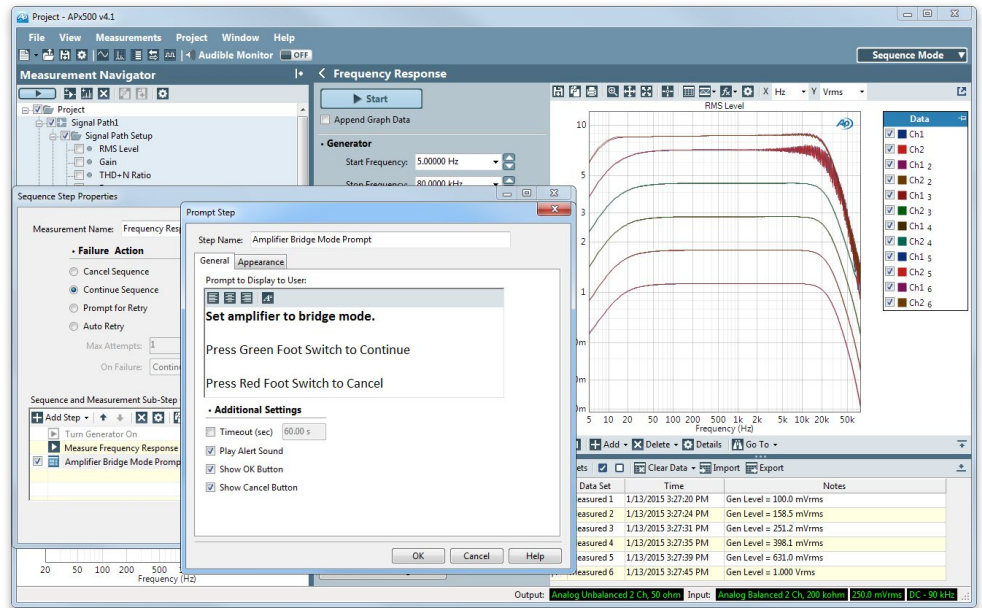

A	C	D	E	F	G
7	Operator ID: 4516794		APx515 Serial number 35-89-76-113-57		
8	Date: 5/14/2010		Calibration date: 4/23/2010		
9					
4	Serial number	Test Pass/ Fail Status	Test Start time	Test Stop Time	Left DC Offset
5	424223	PASSED	10:43:03 AM	10:43:06 AM	0.03
6	424224	PASSED	10:43:08 AM	10:43:09 AM	0.03
7	424225	PASSED	10:43:11 AM	10:43:12 AM	0.02
8	424226	PASSED	10:43:14 AM	10:43:15 AM	0.01
9	424227	PASSED	10:43:17 AM	10:43:18 AM	0.03
10	424228	PASSED	10:43:20 AM	10:43:21 AM	0.03
11	424229	PASSED	10:43:23 AM	10:43:24 AM	0.01
12	424230	PASSED	10:43:26 AM	10:43:27 AM	0.01
13	424231	PASSED	10:43:29 AM	10:43:30 AM	0.03
14	424232	FAILED	10:43:32 AM	10:43:33 AM	0.04
15	424233	FAILED	10:43:35 AM	10:43:36 AM	0.05
16	424234	PASSED	10:43:38 AM	10:43:39 AM	0.01
17	424235	PASSED	10:43:41 AM	10:43:42 AM	0.02
18	424236	PASSED	10:43:44 AM	10:43:45 AM	0.01
19	424237	PASSED	10:43:47 AM	10:43:48 AM	0.02

FAST & INTUITIVE UI
A test engineer adds footswitch interaction to a sequence without a single line of code required.

BEST-IN-CLASS FOR SPEED
Production line results from APx515.

KEY SPECIFICATIONS

SYSTEM PERFORMANCE

Residual THD+N (20 kHz BW)
-102dB + 1.4 μ V
Typical <-106 dB (1 kHz, 2.0 V)

GENERATOR PERFORMANCE

Sine Frequency Range
0.1 Hz to 80.1 kHz

Frequency Accuracy
3 ppm

IMD Test Signals
SMPTE, MOD, DFD

Maximum Amplitude (balanced)
16.00 Vrms

Amplitude Accuracy
 ± 0.05 dB

Flatness (5 Hz - 20 kHz)
 ± 0.010 dB

Analog Output Configurations
Unbalanced, balanced, common mode

Digital Output Sampling Rate
22 kS/s - 216 kS/s

Dolby / DTS Generator
Yes (encoded file)

ANALYZER PERFORMANCE

Maximum Rated Input Voltage
125 Vpk

Maximum Bandwidth
>90 kHz

IMD Measurement Capability
SMPTE, MOD, DFD

Amplitude Accuracy (1 kHz)
 ± 0.05 dB

Amplitude Flatness (10 Hz - 20 kHz)
 ± 0.010 dB

Residual Input Noise (20 kHz BW)
1.4 μ V

Individual Harmonic Analyzer
d2-d10

Maximum FFT Length
1024K points

DC Voltage Measurement
Yes



Accredited by A2LA
under ISO/IEC: 17025
for equipment calibration